



Available in 1 gallon, 5 gallons & 55 gallons

Pro-Seal DP-36® is a single component polycarbon/polycarbonate reactive, osmotic, liquid that seals, densifies, hardens, reduces vapor drive and preserves most concrete substrates when used as part of a Pro-Seal® system.


APPLICATION

- On Grade
- Below Grade
- Negative Side
- Vertical, Horizontal or over head applications

Penetrates concrete up to 36 inches and increases density by 18 - 23%

ADVANTAGES

- Zero V.O.C.'s
- Leaves a clear natural finish with no film or membrane on the surface
- Provides a prepared surface for better bonding of concrete toppings, coatings, mastics, and paints
- Extracts fluid contaminants from in situ structures of concrete
- Forms a hydrostatic barrier in concrete that greatly reduces vapor water drive and in many cases stops water drive
- Gives concrete waterproof characteristics when used with a Pro-Seal® System
- Prevents freeze thaw damage when used with a Pro-Seal® System

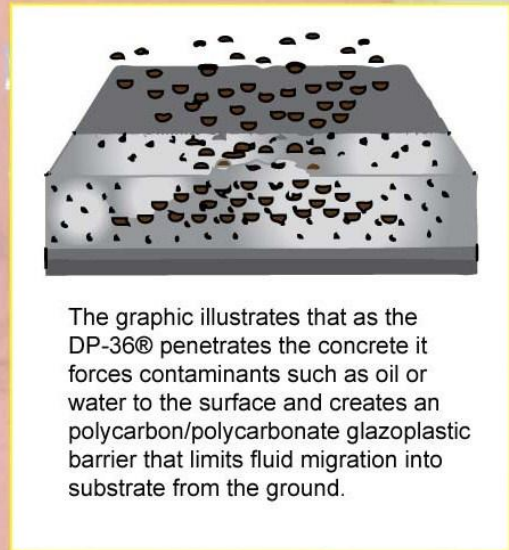

The graphic illustrates that as the DP-36® penetrates the concrete it forces contaminants such as oil or water to the surface and creates a polycarbon/polycarbonate glazoplastic barrier that limits fluid migration into substrate from the ground.



- *Accessible Sales & Technical Departments at 425.488.6570 or information@prosealproducts.com*
- *Technologically Advanced Products that are green-friendly*



16541 Redmond Way • Suite 363C • Redmond, WA 98052

Phone: 425.488.6570 • Fax: 425.488.6926 • prosealproducts.com • information@prosealproducts.com